

Option Flexliner Steel for transport of coils

59-6



To transport three different coil configurations:
1x 23t. | 3x 8t. | 4 x 6t.

Available in combination with FL-3-S Steel
option 52-1-1. Remaining volume is 55 m3
(instead of 57 m3)

No interruption of chassis, so chassis stability
and durability will be maintained.

Less wear of floor due to no elevation at the rear



Drie verschillende coil-configuraties te vervoeren:
1x 23t. | 3x 8t. | 4 x 6t.

Beschikbaar in combinatie met FL-3-S Steel optie
52-1-1. Het resterende volume is 55 m3 (in plaats
van 57 m3).

Geen onderbreking van het chassis, dus de
stabiliteit en duurzaamheid van het chassis blijven
behouden.

Minder slijtage van de vloer door geen verhoging
aan de achterkant





Zum Transport von drei verschiedenen Coil-
Konfigurationen 1x 23t. | 3x 8t. | 4 x 6t.

Verfügbar in Kombination mit FL-3-S Steel
Option 52-1-1. Das verbleibende Volumen ist 55
m3 (statt 57 m3)

Keine Unterbrechung des Fahrwerks, so dass die
Stabilität und Haltbarkeit des Fahrwerks erhalten
bleibt.

Geringere Abnutzung des Bodens, da keine
Erhöhung an der Rückseite

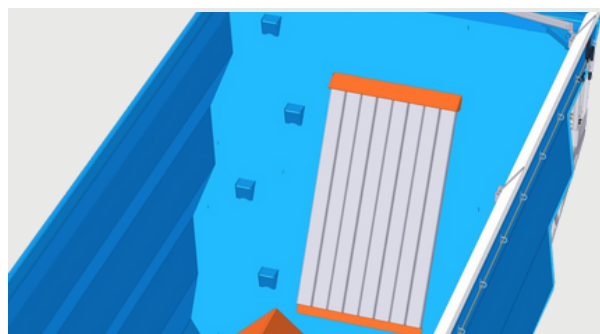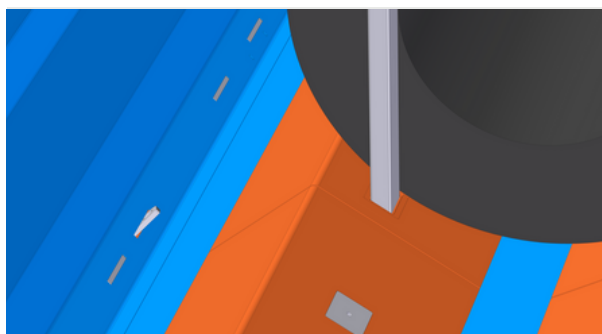

Measurements

Afmetingen, Abmessungen

